



## Product Specifications for the Uhlmann Type TLx Umbrellas

### The Frame

The Type TLx umbrellas are the giants of the world of umbrellas. Capable of covering an entire patio they provide weather protection up to 78 square meters. Our Type TLx round or square umbrellas are manufactured with 12 exceptionally strong roof supporting arms, while the rectangular TLx umbrellas have 10 or 12 arm depending on the umbrellas' length to width ratio. The longer roofing arms are reinforced inside for increased rigidity. Joints are made of highest quality steel. Standard powder coating is RAL 9016 Traffic White. Optional colors include black, gray, silver and bronze. Life-like wood and marble finishes are also available.



### Outside Dimensions:

Round from 8.0 m to 10.0 m diameter  
 or 26' 3" to 32' 10" diameter  
 Square from 6.5 x 6.5 to 7.5 x 7.5 meter  
 or 21' 4" x 21' 4" to 24' 7" x 24' 7"  
 Rectangular from 7.0 x 6.0 to 9.0 x 5.0 meter  
 or 23' 0" x 19' 8" to 29' 6" x 16' 5"

**Mast Diameter:** 110 mm  
 (approx. 4 4/12 inches )  
**Material Thickness:** 5 mm  
 (approx. 2/10 inches)  
**Arm Dimensions:** 56x31x2.5mm  
 (approx. 2 2/10 x 1 7/32 x 1/10 inches)

### The Mechanics

Telescopic design, with cranked level operation. The Type TLx umbrellas operate with a slider in addition to the telescopic mechanism. The roofing arms are mounted individually to the slider plate. The supporting arms are also individually connected to the slider plate. The slider is connected to the telescope with two stainless steel wires enabling easy operation. Maintenance free gearbox built into the mast and rotates the spindle lift.

### The Canopy


Dolan (or Sunbrella) - a strong awning and marine grade material  
 100% solution dyed SunAcrylic fabric, 290 g/m<sup>2</sup> weight, 90% UV filter, Cleangard treated  
 22 standard and 50 plus specialty colors

**Airtex** - Acrylic/Teflon on top side - a lighter weight material  
 195 g/m<sup>2</sup> weight, 80% UV filter, temperature resistance -20C° to 70C°  
 28 standard colors

**Optional Accessories**

- **Rain gutters** for continuous weather protection or to connect umbrellas to a building - can be applied to umbrellas with or without valance
- Easy to attach and remove **side panels** with optional transparent windows (up to 54” tall) and roll-up door – are also available with skirting - can be applied to umbrellas with or without valance
- **Screen-Printing** on roof sections or valances available up to up to 3.45m x 1.4m size and up to 6 colors
- **Protective covers** matched to umbrella size to shield canopy from dirt during installation and storing
- **Heaters** – energy efficient Tansun Rio 015 230V 1500W 6.5A infrared heaters with extreme shock resistant heater elements with 5000 hrs service life - four per umbrella - mounted on fold down arms, using curly cables – wiring must be installed at the time of assembly
- **Light Fixtures** - OSRAM Dulux Brik® EL 9W or OSRAM Lumilux Brik® EL 8W - complete with energy efficient, long lasting lamps – four per umbrella - mounted on supporting arms – wiring must be installed at the time of assembly

**Warning:** Umbrellas cannot be retro-fitted for heaters and or lights after the frame is assembled. Pre-wiring is recommended at the time of ordering

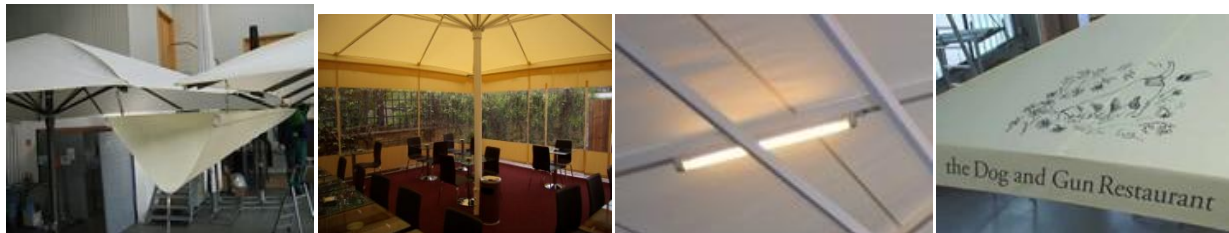

**Installations**

Permanent Installation	In-Ground Sleeve		Base Plate Installation			
	Concrete Base Size		Base Plate Size		Concrete Base Size	
	cm	inches	cm	inches	cm	inches
<b>Up to 23.0 m<sup>2</sup> ( 250 ft<sup>2</sup>)</b>	60x60x60	24x24x24	30x30	12x12	150x150x10	60x60x4
<b>From 23.5 - 48.0 m<sup>2</sup> (251 ft<sup>2</sup> - 520ft<sup>2</sup>)</b>	80x80x60	32x32x24	50x50	20x20	160x160x15	62x62x6
<b>Over 48.0 m<sup>2</sup> (251 ft<sup>2</sup>)</b>	100x100x60	40x40x24	50x50	20x20	165x165x20	64x64x8

In addition to the standard in-ground and base-plate installation we provide custom solutions for permanent installation on roof tops and terraces, and stair step solution to bring umbrellas installed on different levels to the same height.

**Portable Installation**

Type TLx umbrellas are not recommended for portable installation, although portable bases can be used under special circumstances.

Contact us at [www.uhlmann-giantumbrellas.com](http://www.uhlmann-giantumbrellas.com)